


8U VME64x Powered Enclosure


Designed for Rackmount or Tabletop Configurations

Features

- ◆ Single or multiple VME64x backplane options to 21-slots, w/manual or electronic BUSGRANT/IACK jumper options
- ◆ Shrouds on all P0 and P2 backplane connectors
- ◆ 2" recessed, 21-slot wide, 6Ux160mm front card cage
- ◆ Seven rear 6U x 80mm transition module slots
- ◆ Choice of solid or Plexiglass front door
- ◆ Three rear mounted DC cooling fans providing bottom front to top rear air flow
- ◆ Choice of 350W to 800W standard power supplies
- ◆ Front mounted circuit breaker switch, backplane reset switch, voltage indicator LEDs, and voltage test jacks
- ◆ Tabletop feet option
- ◆ Overall dimensions: 8U H x 19" W x 22" D
- ◆ Shipped fully wired and tested

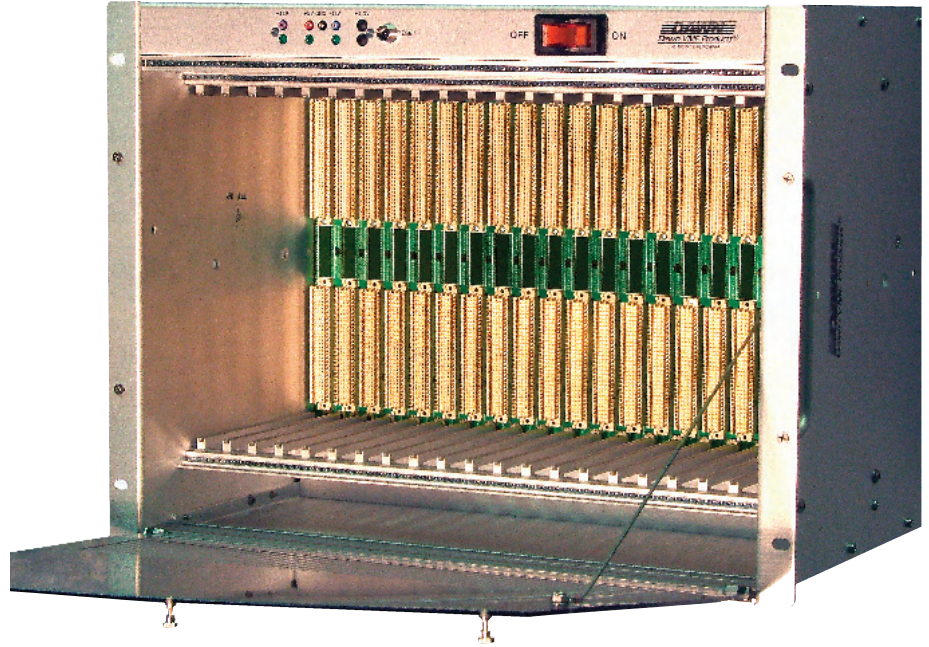

Notes about the model shown above:
 1. Optional hinged Plexiglas® front door in lieu of standard aluminum door.
 2. Handles are installed inward to prevent damage during shipment.

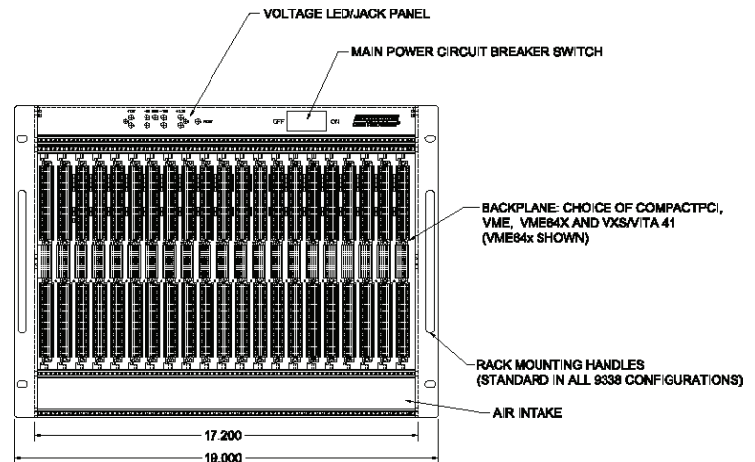

Technical Specifications

Mechanical

Compatibility: ANSI/VITA 1-1994, ANSI/VITA 1.1 - 1997, IEEE 1014-1987, IEEE 1101.1 and IEEE 1101.10

Material: H5052 Aluminum, alodine coated with a grain finish

Dimensions: 13.98" H x 22" D x 19" W (17" internal chassis)

Weight: Under 17~35 lb (configuration dependent)

MTBF: Configured with 21-slot VME backplane, 800W power supply, three DC fan cooling system: >50,000 hr operating at +40°C

Electrical

Maximum Power Draw Per Slot: Approximately 40W per slot

Power Supply Input: See table below

Power Supply Output: See peak output ratings in the following table

Ordering Code	Max. Power (Watts)	Input Voltage	Input Frequency	Input Type	Output Voltages		
					+5V	+12V	-12V
C	350 W	85-264 VAC	47-440 Hz	Autoranging	50 A	12 A	6 A
J	400 W	85-264 VAC	47-440 Hz	Autoranging	55 A	10 A	7 A
N	600 W	85-264 VAC	47-440 Hz	Autoranging	60 A	10 A	4 A
F	800 W	85-264 VAC	47-440 Hz	Autoranging	120 A	10 A	4 A

Environmental

Storage Temperature: -20°C to +85°C

Operating Temperature: 0°C to +50°C

Humidity: <95% non-condensing

Cooling: Three (3) 120mmx24mm, 12VDC fans with >250 CFM (combined)

Ordering Information

11-1009338-XXXX

System Power

- C = 350W
- J = 400W
- N = 600W
- F = 800W

Transition Module, Fan, Door and Tabletop Foot Kit Options

- A = T.M., AC Fan, Metal Door
- B = T.M., AC Fan, Metal Door, Foot Kit Installed
- C = **T.M., DC Fan, Metal Door**
- D = **T.M., DC Fan, Metal Door, Foot Kit Installed**
- E = No T.M., AC Fan, Metal Door
- F = No T.M., AC Fan, Metal Door, Foot Kit Installed
- G = **No T.M., DC Fan, Metal Door**
- H = **No T.M., DC Fan, Metal Door, Foot Kit Installed**
- I = T.M., AC Fan, Clear Door
- J = T.M., AC Fan, Clear Door, Foot Kit Installed
- K = **T.M., DC Fan, Clear Door**
- L = **T.M., DC Fan, Clear Door, Foot Kit Installed**
- M = No T.M., AC Fan, Clear Door
- N = No T.M., AC Fan, Clear Door, Foot Kit Installed
- O = **No T.M., DC Fan, Clear Door**
- P = **No T.M., DC Fan, Clear Door, Foot Kit Installed**

Bold indicates standard configuration

Number of VME64x Backplane Slots

Without P0 Connector


- 02-21 = 2 through 21 slots, manual BG/IACK jumpering
- 23-41 = 3 through 21 slots, electronic BG/IACK jumpering

With P0 Connector

- 42-61 = 2 through 21 slots, manual BG/IACK jumpering
- 63-81 = 3 through 21 slots, electronic BG/IACK jumpering

Dawn also offers VME64x backplanes with automatic connector BG/IACK jumpering. Call for ordering information.

Enclosure Features

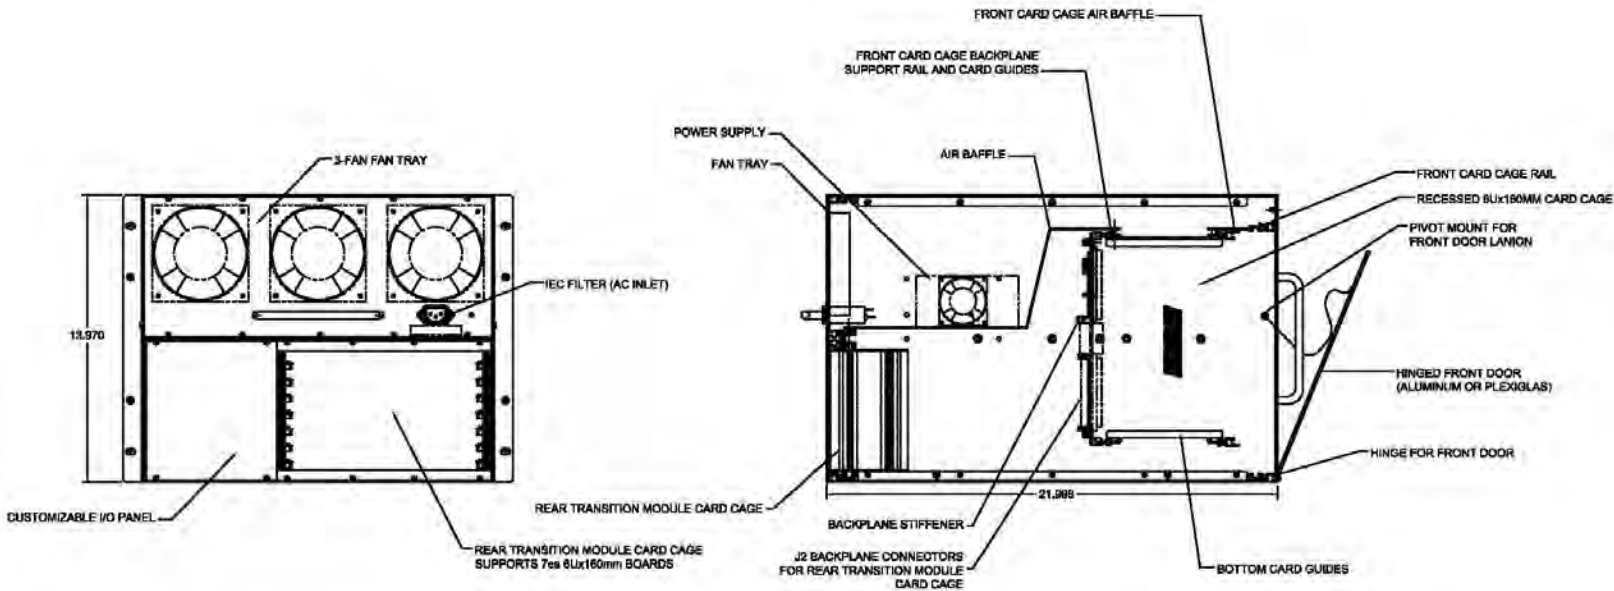

Rear View

Side View

